

3L-SCD (3 LAYER Silicone Coated Duct)

- ✓ 3L SCD (3 Layer Silicone Coated Duct) is designed to maximize 'Advantages of SCD'
RECYCLE MATERIAL applied in 2nd Layer
 Installation available even in Cold Climates
 Resistance to Soil Movement & Root Impingement

- ✓ **Installation :** Conduit (Existing) , Plow , Burial, Aerial
Application : Tele-Network / Mobile / Internet / Broadcasting



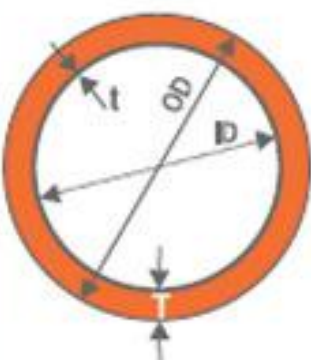

Structure	Main Features
3 rd Layer (Outer)	Made by PE 100 for higher Durability
2 nd Layer (Middle)	Saving by Recycle PE
1 st Layer (Inner)	Reducing Friction by Coated Silicone



Coefficient of friction : 0.07.

✓ Product Spec. & Structure

(mm)

Model	I.D	O.D	T	t	Structure & Color
22	22.0	26.6	2.3	0.5	 
25	25.0	29.6	2.3	0.5	
29	29.0	35.0	3.0	0.5	
35	35.0	41.0	3.0	0.5	
38	38.0	44.0	3.0	0.5	
40	34.0	40.0	3.0	0.5	

* Customization Available Upon Request

Available in Any Color